


热收缩护套管

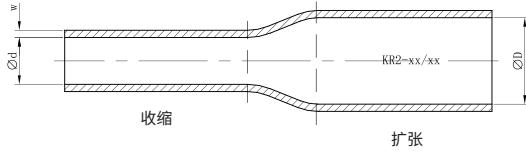

- ▶ 适用于36kV及以下中低压场景
- ▶ 用于绝缘防护
- ▶ 适用于电缆终端和中间连接的绝缘保护

特性

- 优良的耐腐蚀性能
- 耐紫外线和耐风化
- 无卤非阻燃
- 优越的电气和机械性能
- 收缩比3:1
- 半硬中壁

型号规格	适用直径范围 (mm)	扩张(mm)		收缩(mm)	
		内径D	内径d(最大)	壁厚w(最小)	
KR2-20/5	5.5-14	20	5	2	
KR2-33/8	9-23	33	8	2	
KR2-40/12	13-28	40	12	2	
KR2-50/16	17-35	50	16	2	
KR2-63/19	21-45	63	19	2.4	
KR2-75/22	24-52	75	22	2.7	
KR2-85/25	27-60	85	25	2.8	
KR2-95/29	32-66	95	29	3.1	
KR2-115/35	38-80	115	35	3.1	
KR2-140/42	45-98	140	42	3.1	
KR2-160/50	55-112	160	50	3.2	
KR2-180/60	65-126	180	60	3.2	